




HTF BEARING LLC

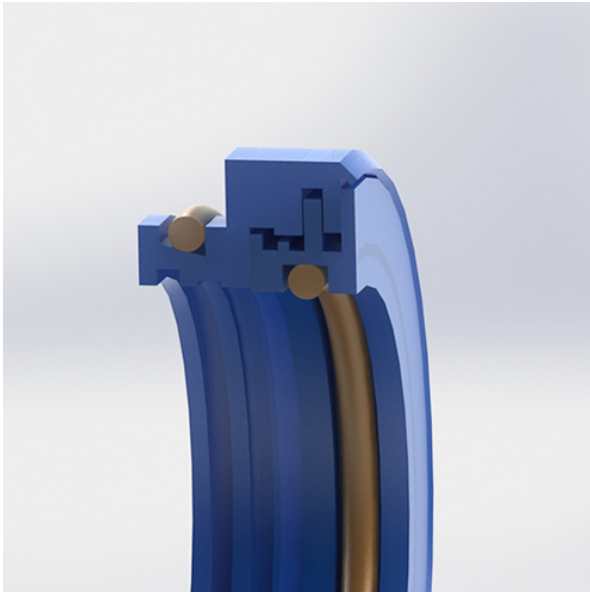

29507-4564 Bearing 2D drawings and 3D CAD models

Garlock 29507-4564 Bearing Isolators

Bearing No. 29507-4564

| | |
|-------------------------------|--|
| shaft diameter: | 2.8750 in |
| typical application: | Exceptional Bearing Protection, Rotating Applications, Pumps, Gearboxes, Motors, Energy Efficient Applications, Primary Metals Industry, Steel Industry, Aluminum Industry, Pulp and Paper Industry, Che |
| lip material: | Labyrinth |
| harmonization code: | 3926904590.US |
| construction description: | ISO-GARD® Small Cross-Section Design, Filled PTFE Rotor and Stator, FKM O-Rings, and 0.375" Flange ISO-GARD® Small Cross-Section Design Filled PTFE Rotor and Stator FK |
| manufacturer catalog number: | 29507-4564 |
| continuous temperature range: | -22 to 400 ° F |
| Weight | 0.27 lb |
| maximum shaft surface speed: | 4500 fpm |
| D | 3.5000 in |
| misalignment tolerance: | 0.020 in |
| width: | 0.6250 in |
| pressure tolerance: | Ambient |